

# LAWN-MOWER BATTERY

Higher Capacity, Higher CCA



[www.leoch.com](http://www.leoch.com)



Facebook



LinkedIn

+86-755-86036060(100lines)

[export@leoch.com](mailto:export@leoch.com)

[www.leoch.com](http://www.leoch.com)

© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice E&OE.

LB-U1-PB-EN-V2.1-202504

**LEOCH**  
LEOCH BATTERY

## Flooded Maintenance Free (MF) Type

- ◆ Design for lawn mower.
- ◆ Extreme startup ability and high capacity.
- ◆ Absolutely maintenance-free due to modern.
- ◆ Leakage and spill proof.
- ◆ Vibration proof.
- ◆ Long service life.

## Flooded Dry Charged Type

- ◆ Design for ride on mowers and garden equipment.
- ◆ Application of TTP technology.
- ◆ Dry charged design, long storage time, can be used at any time you want.
- ◆ Extreme startup ability and high capacity.
- ◆ Excellent vibration resistance.
- ◆ Acid pack and diversion tube included for initial filling.

### Applications

- ◆ Garden Tractors
- ◆ Lawn Tractors
- ◆ Riding Movers
- ◆ Rear Engine Riders
- ◆ Zero Turn Movers
- ◆ Small Engine



## Maintenance Free (MF) Type

Model	Voltage (V)	C20 (Ah)	RC (min)	CCA	Maximum Overall Dimension(mm)				layout	Terminal	Hold Down	Handles
					L	W	H	TH				
<b>Flooded Maintenance Free (MF) Type</b>												
U1(R)-215	12	17	22	215	196	132	159	185	1/0	4	B0	TS9
U1(R)-250	12	20	24	250	196	132	159	185	1/0	4	B0	TS9
U1(R)-300	12	23	32	300	196	132	159	185	1/0	4	B0	TS9
U1(R)-355	12	29	41	355	196	132	159	185	1/0	4	B0	TS9
U1(R)-215	12	17	22	215	196	132	155	180	1/0	4	B0	TS9
U1(R)-250	12	20	24	250	196	132	155	180	1/0	4	B0	TS9
U1(R)-300	12	23	32	300	196	132	155	180	1/0	4	B0	TS9
U1(R)-355	12	29	41	355	196	132	155	180	1/0	4	B0	TS9
<b>Flooded Dry Charged Type</b>												
U1(R)-9	12	25	/	220	195	130	166.5	180	1/0	G	B0	/
U1(R)-11	12	31.5	/	280	195	130	166.5	180	1/0	G	B0	/

## MF Battery Structure

### L Type Terminal

Fits most cable assemblies with quick installation.

### Handle

Hidden design and easy carry

### Container

- PP material with high intension, smooth and clear surface.
- Anti shock and vibration structure design

### Magic-Eye Indicator

- Display the charge status
- Easy to check charging-state

### TTP Welding


Reduce electrical resistance to deliver more power per pound

### Plate

- Lead-calcium alloy grid
- Computer-controlled plate which increase battery performance and durability

### PE Separator

Virtually eliminate shorts and extend battery life

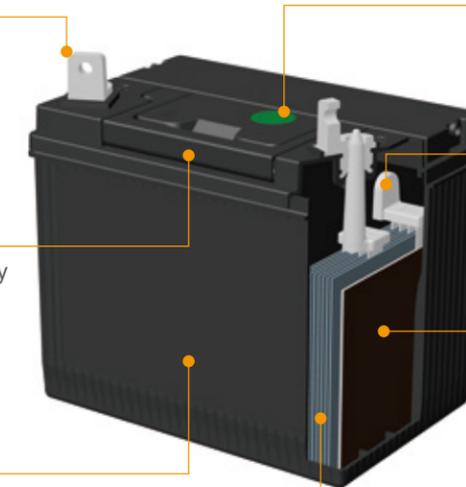

## Dry Charge Battery Structure

### L Type Terminal

Fits most cable assemblies with quick installation.

### Vent plug

Easy to maintenance

### Container

- PP material with high intension, smooth and clear surface.
- Anti shock and vibration structure design

### TTP Welding

Reduce electrical resistance to deliver more power per pound

### PE Separator

Virtually eliminate shorts and extend battery life

### Plate

- Lead-calcium alloy grid
- Computer-controlled plate which increase battery performance and durability

