

ISO14001

ISO9001

ISO45001



www.leoch.com



Facebook



LinkedIn



LHR

Leoch High Rate Battery

★ China sales office

14/F, Building 6A, Zhonggang Plaza, Exhibition Bay,
Fuhai Street, Baoan District, Shenzhen 518103

+86-755-86036060(100lines)

export@leoch.com

www.leoch.com

© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice E&OE.

LB-LHR-PB-EN-V4.1-202503



■ Characteristics


- Long design life.
- ABS material: UL 94 HB or V-0 optional.
- Wide temperature range: -20°C~55°C.
- Oxygen recombination efficiency: ≥98%.
- Valve Regulated Lead Acid (VRLA) Battery, Maintenance Free.
- PbCaSn alloy for plate grids: less gassing, less self-discharging.
- Unique vent valve design: control water losing, prevent air and spark entering.
- Special grid and plate manufacture technology, automatic manufacture line, raise the life and uniformity of battery.
- 3D structure: Optimized design of active material adhesion, fine mesh grid provides more surface area for high power output.
- Special paste formula, advanced welding technology to ensure excellent high power discharge capacity(W/15Mr, up 20%).



■ Applications



■ UPS Application

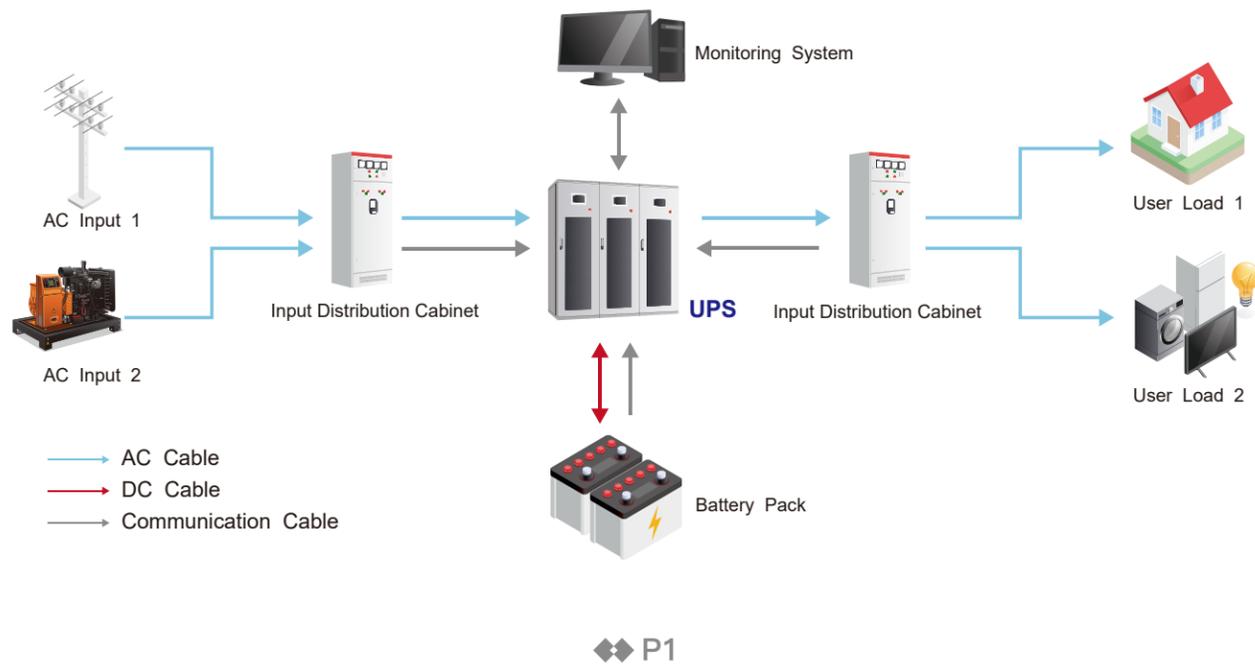

■ LHR Specifications-12V series

Model	Rated Voltage (V)	Rated Capacity		Dimensions(mm)				Terminal	Weight (Kg)
		W ₁₅ (W/cell) @1.67V/cell	C ₁₀ (Ah) @1.80V/cell	L	W	H	TH		
LHR1224W(A)	12	24	6.56	151	65	93.5	99.5	T1/T2	2.13
LHR1226W(A)	12	26	6.56	151	65	93.5	99.5	T1/T2	2.17
LHR1228W(A)	12	28	7.02	151	65	93.5	99.5	T1/T2	2.24
LHR1232W(A)	12	32	7.49	151	65	93.5	99.5	T1/T2	2.31
LHR1234W(A)	12	34	7.49	151	65	93.5	99.5	T1/T2	2.35
LHR1236W(A)	12	36	8.43	151	65	93.5	99.5	T1/T2	2.46
LHR1224W	12	24	5.3	90	70	101	107	T1/T2	1.88
LHR1226W	12	26	6.51	151	65	93.5	99.5	T1/T2	2.08
LHR1230W	12	30	7	151	65	93.5	99.5	T1/T2	2.38
LHR1235W	12	35	7.8	151	65	93.5	99.5	T1/T2	2.50
LHR1236W	12	36	7.49	151	65	93.5	99.5	T2	2.70
LHR1242W	12	42	8.43	151	65	94.5	100.5	T1/T2	2.83
LHR1255W	12	55	13	151	98	95	101	T1/T2	3.78
LHR1285W	12	85	18.6	181.5	76.5	167.5	167.5	T12(M5)	6.00
LHR12120W	12	120	38	197	165	170	170	T6(M6)	11.60
LHR12160W	12	160	45	197	165	170	170	T6(M6)	14.20
LHR12185W	12	185	55	229	138	205	211	T6(M6)	16.20
LHR12215W	12	215	65	348	167	178	178	T6(M6)	19.20
LHR12255W	12	255	70	348	167	178	178	T6(M6)	21.40
LHR12300W	12	300	75	256	173	213	216	T11(M8)	23.70
LHR12330W(A)	12	330	80	293	173	213	216	T11(M8)	26.70
LHR12350W	12	350	85	293	173	213	216	T11(M8)	27.40
LHR12360W	12	360	100	330	173	213	216	T11(M8)	30.00
LHR12370W	12	370	100	330	173	212	220	T11(M8)	30.70
LHR12400W	12	400	100	330	173	213	216	T11(M8)	31.20
LHR12430W	12	430	100	330	173	213	216	T11(M8)	32.00
LHR12460W	12	460	120	408	177	225	225	T11(M8)	37.50
LHR12480W	12	480	115	379	174	214	217	T11(M8)	40.50
LHR12510W	12	510	140	483	170	238.5	239	T11(M8)	43.60
LHR12560W	12	560	145	483	170	238.5	239	T11(M8)	46.50
LHR12705W	12	705	190	532	207	214	220	T11(M8)	59.00
LHR12800W	12	800	215	522	240	218	224	T11(M8)	68.00
LHR12845W	12	845	225	496	259	227	233	T11(M8)	74.50
LHR12890W	12	890	235	496	259	227	233	T11(M8)	77.00
LHR12950W	12	950	230	521	268	220	226	T11(M8)	77.50
LHR121000W	12	1000	250	521	268	220	226	T11(M8)	79.50

■ LHR Specifications-12V FT series


Model	Rated Voltage (V)	Rated Capacity		Dimensions(mm)				Terminal	Weight (Kg)
		W ₁₅ (W/cell) @1.67V/cell	C ₁₀ (Ah) @1.80V/cell	L	W	H	TH		
LHR12390FT	12	390	95	508	110	235	235	T6-A(M8)	34.00
LHR12550FT	12	550	140	551	110	288	288	T6-A(M8)	47.50
LHR12600FT	12	600	150	550	125	281.5	281.5	T11(M8)	51.00
LHR12700FT	12	700	180	560	125	318	318	T11(M8)	60.00
LHR12750FT	12	750	190	560	125	318	318	T11(M8)	63.50
LHR12800FT	12	800	210	541	154	322	322	T13-C(M8)	75.50
LHR12900FT	12	900	225	541	154	322	322	T13-C(M8)	80.00
LHR121000FT	12	1000	240	541	154	322	322	T13-C(M8)	84.50

LHR Specifications-2V series


Model	Rated Voltage (V)	Rated Capacity		Dimensions(mm)				Terminal	Weight (Kg)
		W_{js} (W/cell) @1.67V/cell	C_{10} (Ah) @1.80V/cell	L	W	H	TH		
LHR500W	2	500	180	90	181	350	365	T18(M8)	11.80
LHR600W	2	600	200	90	181	350	365	T18(M8)	12.80
LHR750W	2	750	250	171	111	328	344	T18(M8)	15.00
LHR900W	2	900	300	124	181	350	365	T18(M8)	18.20
LHR1000W	2	1000	300	171	150	328	344	T18(M8)	20.60
LHR1200W	2	1200	400	158	181	350	365	T18(M8)	24.10
LHR1250W	2	1250	400	210	175	330	346	T18(M8)	27.60
LHR1520W	2	1520	500	210	175	330	346	T18(M8)	30.30
LHR1800W	2	1800	600	225	181	350	365	T18(M8)	36.20
LHR2000W	2	2000	600	240	175	330	346	T18(M8)	36.70
LHR2400W	2	2400	800	303	181	350	365	T18(M8)	48.50
LHR2500W	2	2500	720	300	175	330	345	T18(M8)	46.40
LHR2900W	2	2900	900	410	175	330	345	T18(M8)	58.50

Terminal


T1

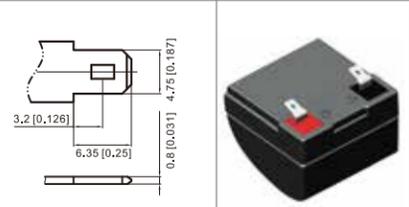


T2

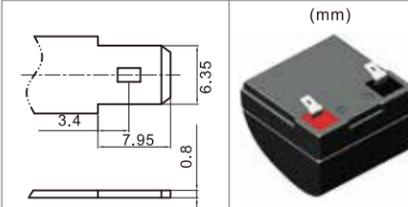


T6

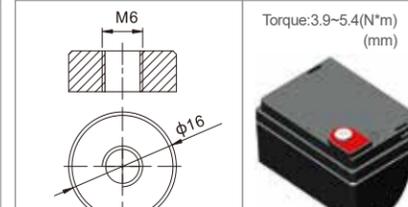


T11

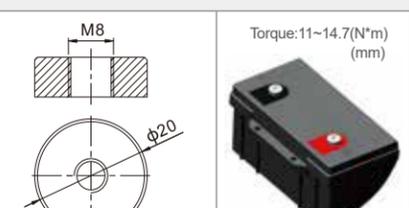

T12

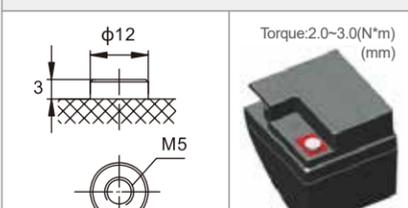

T18



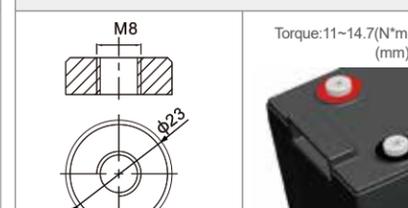


Compliant Standards

- IEC60896-21/22
- GB/ T 19639
- JIS C 8702
- UL 94 and UL1989
- GB/ T 19638
- JIS C 8704

◆◆ P3

Characteristics curves

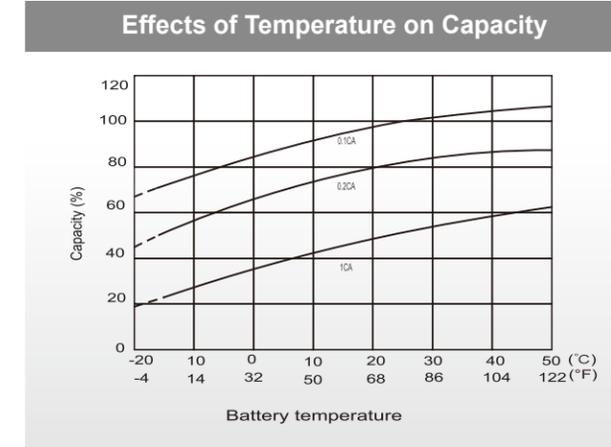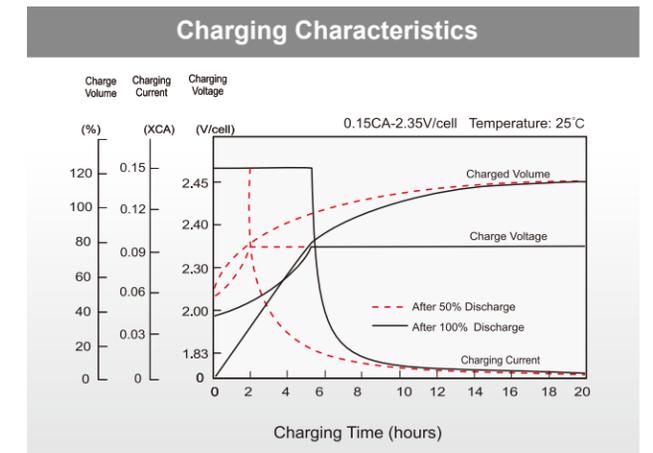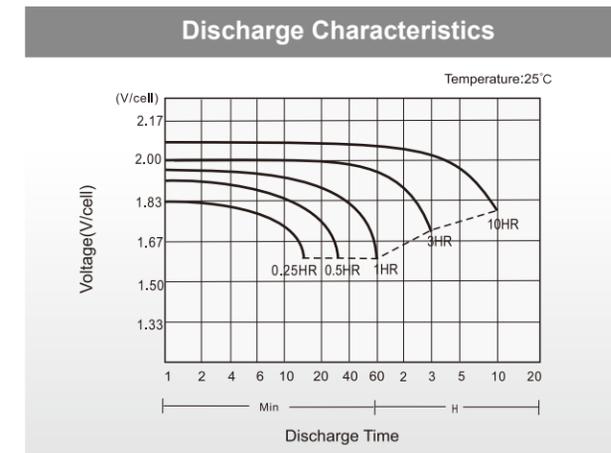


◆◆ P4



■ UPS Configuration

Constant power calculation:

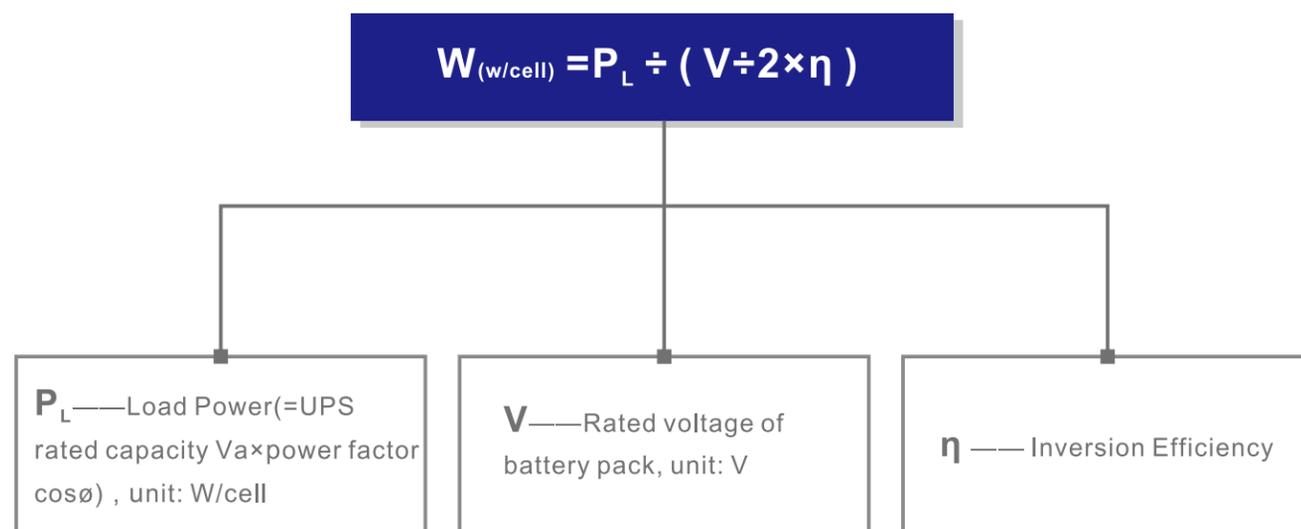

Notes:

1. The rated capacity of UPS commonly used KVA representation, for example: 160kVA, $P_L = 160 \times 1000 \times \cos\phi$;
2. "V÷2" is the number of cells for per battery pack (for example: The 12V battery is composed of 6 cells, rated voltage per cell is 2V);
3. According to the value of W, find the constant power discharge parameters from the specs to determine the battery model.

■ Product Description

Structure	
Positive Plate	Lead calcium mesh reduce corrosion and extend life
Negative Plate	Equilibrium lead calcium mesh, optimized recombination efficiency
AGM Separator	High strength, low resistance, micro porous glass fiber makes the electrolyte completely absorbed by the structure
Connector	Lead/Copper connector provide better conductivity
Case/Cover Material	ABS (UL 94 HB or V-0)

Operating Temperature Range (OTR)	
Recommended Temperature	(25±3)°C
Discharging	-20 ~ 55°C
Charging	-20 ~ 40°C
Storage	-15 ~ 50°C

Performance	
Max. Charging Current	≤ 0.25CA
Float Charging Voltage	2.25~2.30V/cell, Temp.Coefficient: -3mV/°C/cell(@ 25°C)
Equalizing Charging	2.30~2.40V/cell, Temp.Coefficient: -4mV/°C/cell(@ 25°C)
Self-discharge Rate	≤ 3% / month @25°C